

System 28 Welding and Clamping Table





System 28



Contents

2-3
4-5
8-9
10-17
18-19
20-22
20-22 23
23

We reserve the right to make technical changes. 07.2004



Planning


Developing

Activating

Innovation is our field!

During our many years of activity in the metal sector, we of the Bernd Siegmund Group have made considerable contributions towards the many products, ideas and developments which today can be regarded as standards.

It is our target to offer you products which improve your production, regardless of whether this is in a major industry or in a medium-sized concern.

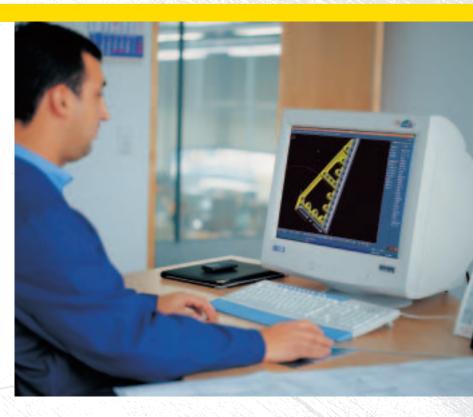

Our many years of experience with welding tables enables us today to develop and test products which will make your work more effective, simpler and safer tomorrow.

We set standards - for your success!



solid - compatible - modular - for everyday use

Precision from the beginning!

Using the latest CNC production methods (i.e. processing on five sides), enables us to offer you top quality. The precision, 28 mm drill holes, sunk from beneath in combination with the 100 mm grid, provides an option in flexibility and compatibility.



Plates supported by 80 mm rips

Solid execution (material thickness about 24-32 mm made of ST 52/3) Cast iron version available on request) Ground or finely-milled surface.

article no. 0080

Standard 2400x1200x30 2400 x 1200 x 100 mm - weight: 740 kg - table height 850 mm

4 legs, option 5th. leg
 with castors 850 0081
 with anchorage 850 0082
 adjustable height 720-1070 0083
 adjustable height 550-800 0084

article no. 0070

Standard 2000x1000x30 2000 x 1000 x 100 mm - weight: 520 kg - table height 850 mm - 4 legs, option 5th. leg - with castors 850 0071 - with anchorage 850 0072 - adjustable height 720-1070 0073 - adjustable height 550-800 0074



Komfort Table

article no. 0010	article no. 0015	article no. 0035	article no. 0050
Comfort 1000x1000x200	Comfort 1200x1200x200	Comfort 1500x1000x200	Comfort 1500x1500x200
1000 x 1000 x 200 mm	1200 x 1200 x 200 mm	1500 x 1000 x 200 mm	1500 x 1500 x 200 mm
- weight: 450 kg	- weight: 650 kg	- weight: 670 kg	- weight: 950 kg
- table height 850 mm			
- 4 legs	- 4 legs	- 4 legs	- 4 legs
- with castors 850 0011	- with castors 850 0016	- with castors 850 0036	- with castors 850 0051
- with anchorage 850 0012	- with anchorage 850 0017	- with anchorage 850 0037	- with anchorage 850 0052
- adjustable height 820-1170 0013	- adjustable height 820-1170 0018	- adjustable height 820-1170 0038	- adjustable height 820-1170 0053
- adjustable height 650-900 0014	- adjustable height 650-900 0019	- adjustable height 650-900 0039	- adjustable height 650-900 0054



* also available for delivery with completly hardend surface (e.g. Hardox 400)

article no. 0055

Comfort 4000x2000x200 4000 x 2000 x 200 mm - weight: 3000 kg - table height 850 mm - 8 legs - with anchorage 850 0057 - adjustable height 820-1170 0058 - adjustable height 650-900 0059

article no. 0040

Comfort 3000x1500x200 3000 x 1500 x 200 mm - weight: 1600 kg - table height 850 mm - 6 legs

- with anchorage 850 0042 - adjustable height 820-1170 0043 - adjustable height 650-900 0044

article no. 0030

Comfort 2400x1200x200

2400 x 1200 x 200 mm - weight: 1100 kg - table height 850 mm - 4 legs - with castors 850 0031 - with anchorage 850 0032 - adjustable height 820-1170 0033 - adjustable height 650-900 0034

article no. 0020

Comfort 2000x1000x200 2000 x 1000 x 200 mm - weight: 800 kg - table height 850 mm - 4 legs - with castors 850 0021 - with anchorage 850 0022 - adjustable height 820-1170 0023 - adjustable height 650-900 0024

2


Table legs



Siegmund

Table legs to suit every type of floor

Not only are they good to look at, but they are also flexible and safe. If they don't suit you, ten we'll make them right! Due to a large selection we are able to make sure that your S4 stands solidly and safely. Whether powdercoated or specially lacquered, our bench legs provide the safest support!

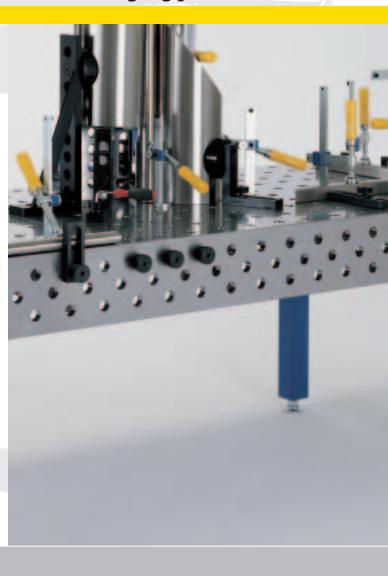



flexible

To calculate the overall height of combinations, one must add 100 mm to the height of Standard table and 200 mm to Comfort table. All legs are equipped with either a base plate or a castor. The weight-bearing capacity results from the maximal 30 mm screwed thread.







article no.

Leg basic 820 mm **0856** 750 mm **0857** 650 mm **0858** - Weight bearing capacity 1000 kg

Leg adjustable height

- Weight bearing capacity

620 - 970 mm **0860**

450 - 700 mm **0862**

article no.

1000 kg



article no.

Leg with castors 820 mm **0864** 750 mm **0865** 650 mm **0866** - Weight bearing capacity 600 kg - supported Spindle

article no.

Leg with anchorage 820 mm **0870** 750 mm **0871** 650 mm **0872** - Weight bearing capacity 1000 kg




article no. 0868

Plate for floor anchoring - Alternative to basic foot configuration




Welding and clamping table S4

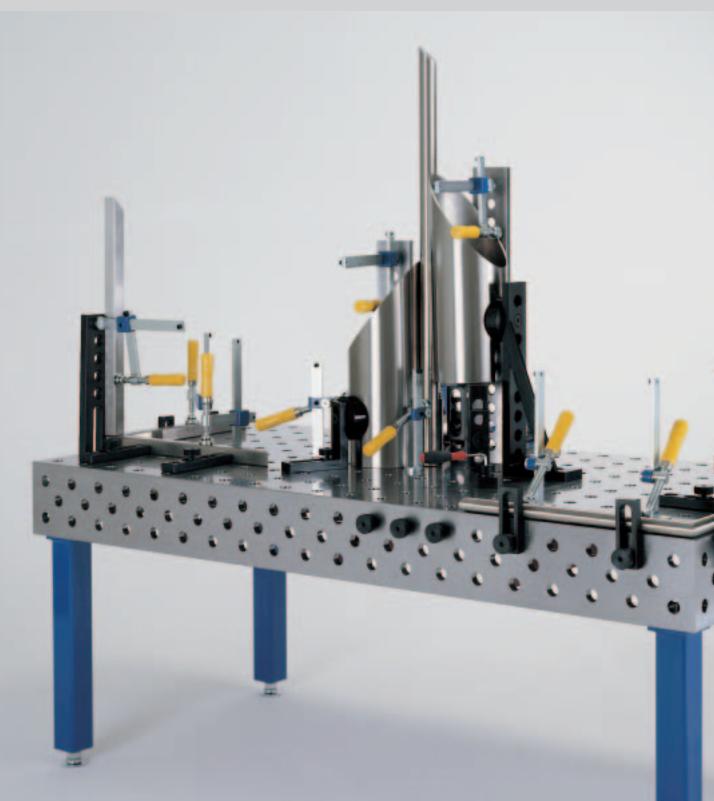

Technology: conceived by professionals Principle: easy + logical Quality: easily made Advantage: quick + precise

620

One table does everything!

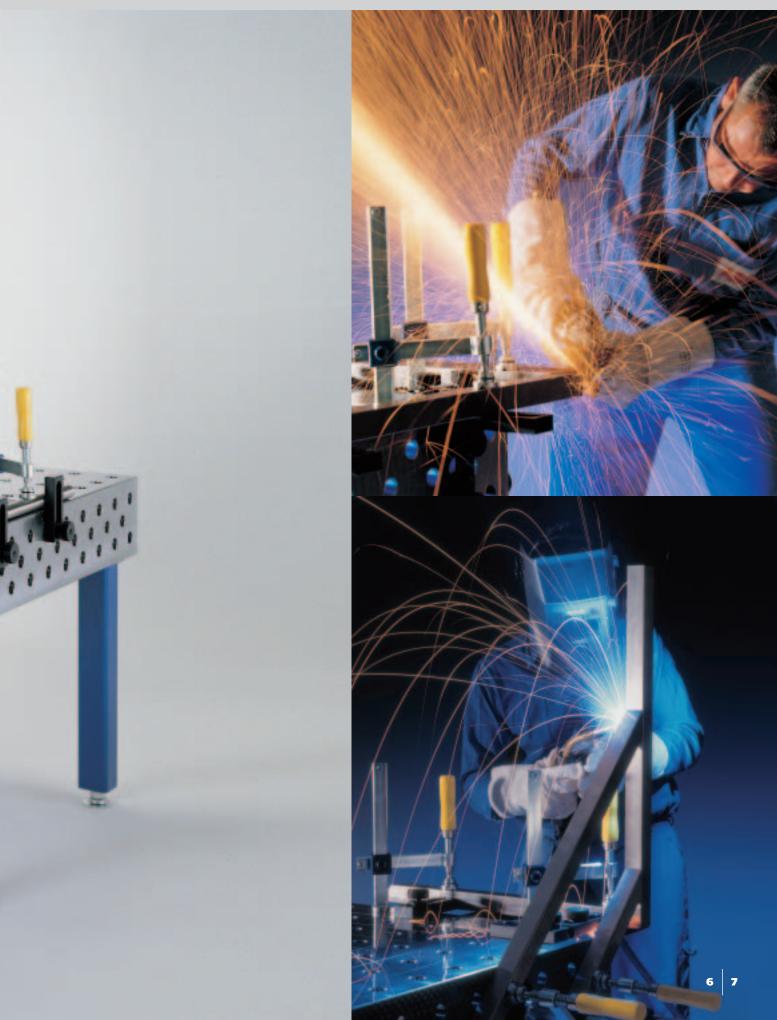

Stops



article no. 0402

Eccentric Stop 60 with M10 thread Ø 60 mm - weight: 0.4 kg

- with M10 thread for mass connections - burnished

article no. 0401

Eccentric Stop 60 Ø 60 mm - weight: 0.4 kg - suitable in the case of space problems - burnished














article no. 0420

Universal Stop 225 L

225 x 50 x 25 mm - weight: 1.4 kg - tight and variably determined - through the long and drilled hole it allows for universal all fast clamping/tensioning systems - burnished

article no. 0410

Universal Stop 150 L 150 x 50 x 25 mm - weight: 0.8 kg - variably adjustable - through long hole adjustability range has infinite possibilities - Adjustable range equals 100 mm - burnished



Eccentric Stop 100 Ø 100 mm - weight: 1.4 kg - Could also be used as an adaptor - burnished

article no.

Universal Stop - For stop and positioning on larger conponents - 500 S - 500 x 100 x 25 mm 0430 - weight: 7.5 kg - burnished - 750 S - 750 x 100 x 25 mm 0432 - weight: 11 kg - polished - 1000 S - 1000 x 100 x 25 mm 0434 - weight: 15 kg - polished



article no.

Universal Stop - 450 M - 450 x 75 x 25 mm 0440 - weight: 4.6 kg - burnished - 650 M - 650 x 75 x 25 mm 0442 - weight: 6.6 kg - burnished

article no.

Universal Stop

- 325 L - 325 x 50 x 25 mm **0422** - weight: 2.1 kg - burnished - 525 L - 525 x 50 x 25 mm **0424** - weight: 3.5 kg - burnished







It grows and grows and grows

Squares for heavy contructions

Larger dimensions involve larger angles and larger surface.

Thanks to the modular construction, you only have to invest in what you really need. And because the whole thing has been conceived on a building block system, you can use your tools again and again!



Vertical construction using S squares



L-Squares / U-Squares



U-Squares and M-Squares to extend the length and width of the worktable in one




Universal clamping variations combined with a single purchase price

Universal Squares

It is good to be equipped with our angle template. Easily adjusted and fixed, angles can be precisely, quickly and effectively created - as often as you need. Continuous precision. (Adjustment range 15° - 150°)




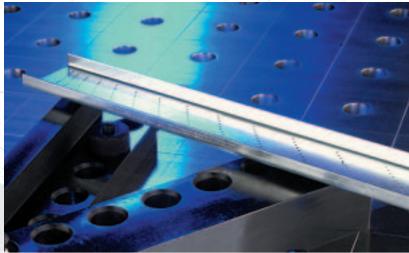

Set the desired angle using the template, tighten with the inbus key



- Compact construction - High precision and exact repetition using the template and externally set setting pins - All parts are interchangeable - Hardened bushing for maximum bolt tension power - Connecting bolts are sunk on one side

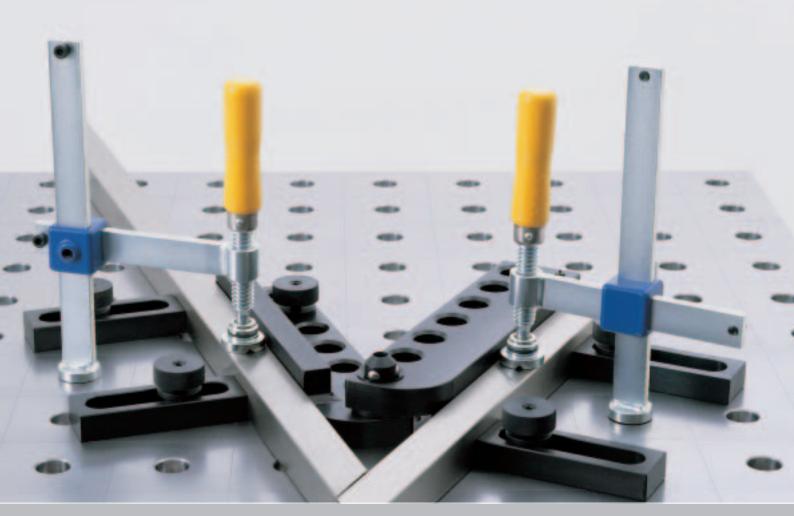

Fixing the parts to be welded along the angles by using the clamps



article no. 0112

Stop and Clamping Square 275 L

275 x 175 x 50 mm - weight: 2.7 kg - Fixed or variably adjustable - Two-sided - burnished

article no. 0110

Stop and Clamping Square 175 L 175 x 175 x 50 mm - weight: 2.1 kg - Fixed or adjustable - Two-sided - burnished

article no. 0105

- burnished

Stop and Clamping Square 75 L 75 x 75 x 50 mm - weight: 1 kg - Stop for large-framed profiles - In combination with 0111 an adjustable supportive height circulation - As support when combined with other clamping elements













Stop and Clamping Square - 300 M - 300 x 200 x 75 mm 0150 - weight: 7 kg - burnished - 500 M - 500 x 200 x 75 mm 0160 - weight: 10 kg - burnished

article no. 0111


Stop and Clamping Square 175 WL 175 x 175 x 50 mm - weight: 1.8 kg - Flexible in each direction - Combined with 0105/0109 as adjustable circulatory stop - burnished



article no. 0109

Stop and Clamping Square 175 SL 175 x 75 x 50 mm - weight: 1.4 kg -- Ideal for Stop on large-framed profiles - An adjustable supportive height circulation at all angles - burnished



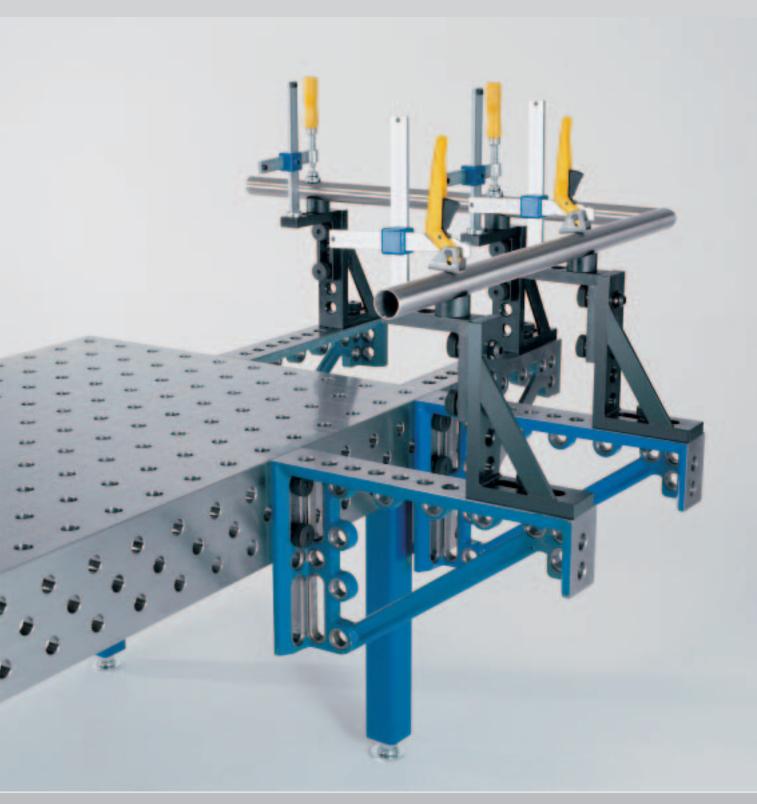

A part of the device

Bench and accessories formed according to the block construction principle with unlimited contruction possibilities.




article no. 0190

Corner connection Standard - weight: 13 kg

- Bench extension diagonally connected with corners. - Also as universal Prism - burnished











Stop and Clamping Square 800 C

- left - 380 x 95 x 800 mm **0144** - right - 380 x 95 x 800 mm **0146** - weight: 28 kg (order in pairs) - Fixed or variably adjustable - triangular - lacquered/varnished - Material GGG 40



Stop and Clamping Square 600 C

- left - 380 x 95 x 600 mm **0134** - right - 380 x 95 x 600 mm 0136 - weight: 22 kg (order in pairs) - Fixed or variably adjustable - triangular - lacquered/varnished - Material GGG 40



article no.

Stop and Clamping Square 300 C - left - 280 x 95 x 300 mm 0124 - right - 280 x 95 x 300 mm **0126** - weight: 12 kg (order in pairs) - Fixed or variably adjustable - four-sided - lacquered/varnished - Material GGG 40

article no.

U-Shape Square 200x200x500

- 200 x 200 x 500 mm **0360** - 200 x 200 x 1000 mm **0370** - 200 x 200 x 1500 mm **0380** - 200 x 200 x 2000 mm **0390** - Holes on all five sides - Connection from table to table - For vertical constructions - Weighs per 500 mm approximately. 25 kg - Polished



L-Shape Square 100x200x500


- 100 x 200 x 500 mm **0310** - 100 x 200 x 1000 mm **0320** - 100 x 200 x 1500 mm **0330** - 100 x 200 x 2000 mm **0340** - Holes on all four sides - Connection from table to table - For vertical constructions - Weighs per 500 mm approximately. 25 kg - Polished

article no. 0170


Universal Square small

weight: 13 kg
Shank length 300 mm
Bolts counter-sunked on one side
Completely adjustable (15° - 150°)
Including positioning device and Allen Key 0852
burnished



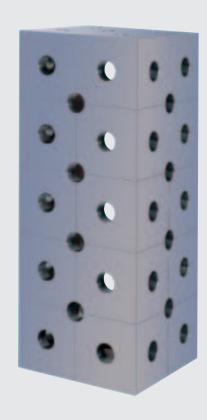







article no. 0171


Universal Square big - weight: 22 kg - Shank length 475 mm - Hydromechanical Clamping - Completely adjustable (0° - 225°) - 14 mm Allen key - lacquered




The correct choice!

Prisms

This round is on you! Special shapes need to be specially held. For clamping round shapes, we have special V-shaped holders, fitting into all 28 mm holes without damaging the them.

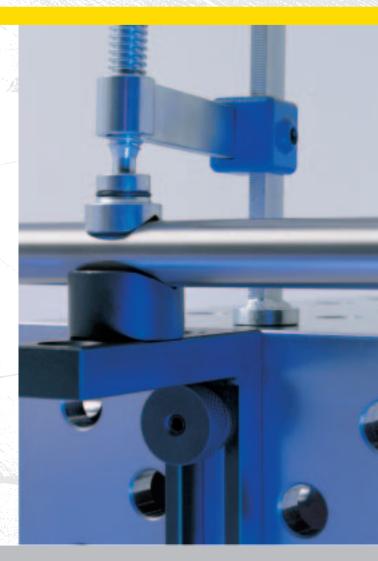



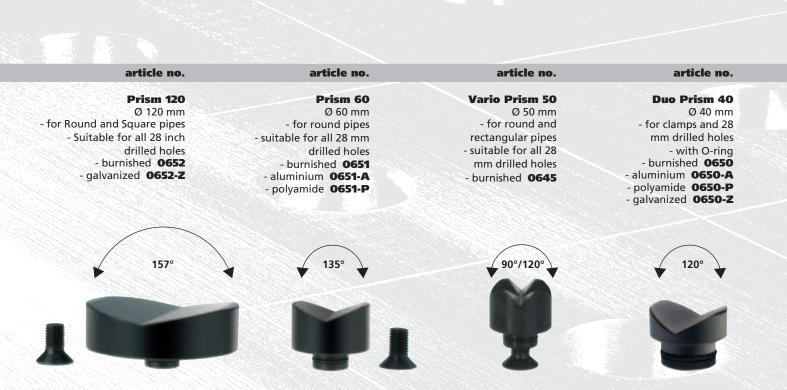



Clamping bolts

At the heart of every clamping system in the clamping bolt. Stable, exact, powerful in retention and easy to clean. Based on a globally accepted ball clamping bolt, we have consequently developed it into a tool truly usable with just one hand.




The clamping bold is additionally hardened and made out of highquality material. All parts are exchangeable.





Large bearing diameter (13 mm)
 Simple to disassemble
 Easy to clean
 Good holding power with easy tightening
 Spare parts available

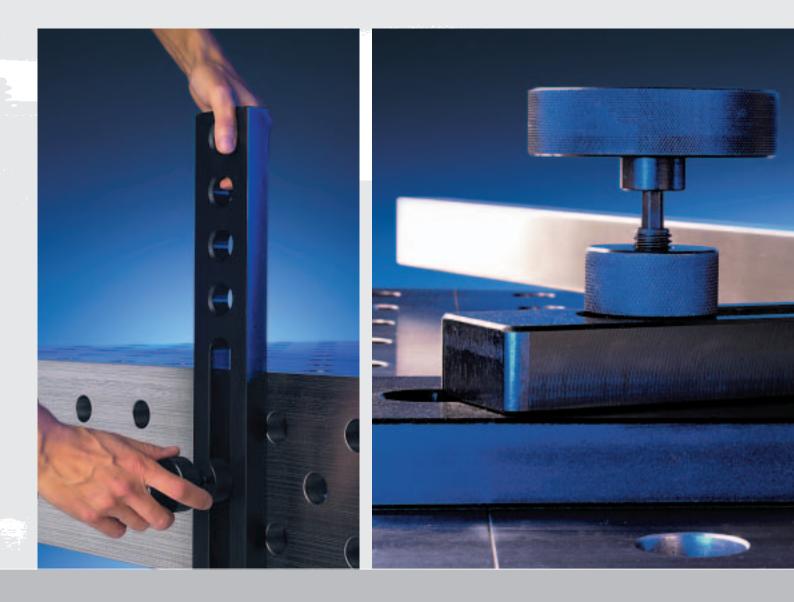

The bearing bolt can be set and tightened with one hand while the other hand holds the part to be clamped.

Long bolts for connecting several clamping tools.

Bolts

article no. 0520

Clamping Bolt short

- Simple tightening without

counterholder, with handle

- with Allen Key inside

0840 or 0850

- burnished

article no. 0510

Fast Clamping Bolt with turn-lock fastener short - for clamping of two components - with integrated handwheel - with Allen Key - burnished



article no. 0530

- burnished

Clamping Bolt long

- clamped by 3 components

- otherwise like Pos. 0520





article no. 0512

- with Allen Key

- burnished

Fast Clamping Bolt with

- for clamping of three components - with integrated handwheel

turn-lock fastener long





Connecting Bolt countersunk

- with countersunk Allen key inside

- Long-term connection

- suitable for long hole

-also for hidden applications

- for connecting 2 components

- for connecting 3 components

article no.

- Self-centering

- burnished

- short 0560

- long 0561



article no. 0528

Counterunk Bolt with balls short - For hidden application - with Allen key inside - burnished



Positioning Bolt long - clamped by 3 components - otherwise like Pos. 0532 - burnished



article no. 0532

Positioning Bolt short - For Allen key 14 - Compatible to all table systems with 28 mm holes - burnished



Clamps

article no. 0615

Fast Tension Clamp - 50-200 mm - for shortest clamping time / period - galvanized

article no. 0630


Screw Clamp 45°/90° - completely adjustable 0-360° - exchangeable prisms - galvanized

article no. 0610

Screw Clamp Standard - 50-180 mm - completely adjustable - exchangeable prisms - galvanized
















Prism for screw clamp - burnished 0657 - stainless steel 0658 - polyamide 0659



Connecting Bolt hexagonal - Hexagonal model



article no. 0540

Positioning Bolt - easily constructed at an angle of 90°, with 3 bolts. - for positioning angles and clamps - as support - burnished




For those times when it just can⊠t go fast enough!



Fast clamping equipment

Ready for large series production!

Increases your production by being flexible. A special adapter gives you the opportunity of using well-established fast clamping systems in your production.

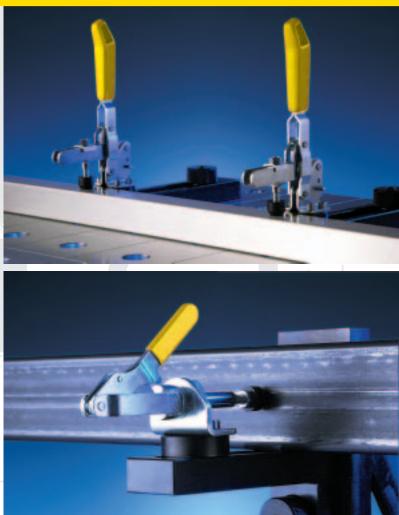



article no. 0720

Raw Adaptor Ø 48 mm - weight: 0.3 kg - Usable in all 28 mm holes - with O-ring - burnished


article no. 0705

Vertical clamp with adapter (delivered without stop iron) - suitable for all 28 mm drilled holes - with O-ring - adapter burnished





10-60 mm






article no. 0715

Adapter for fast tensioner Ø 48 mm

- weight: 0.3 kg - For fast tension clamp with distance between holes according to drawing or customer preferences - Usable in all 28 mm holes - with O-ring - burnished




min. 32 mm


article no. 0710

Connecting rod clamp with adapter (delivered without stop iron) - suitable for all 28 mm drilled holes - with O-ring - adapter burnished




This is how you can build-up your assembly quickly and precisely!

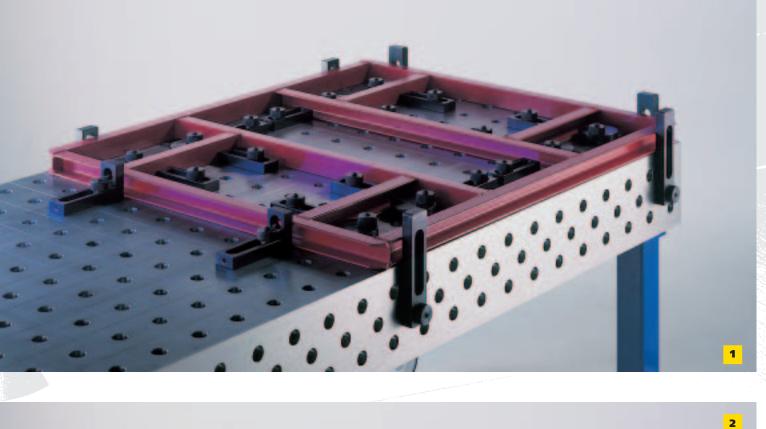

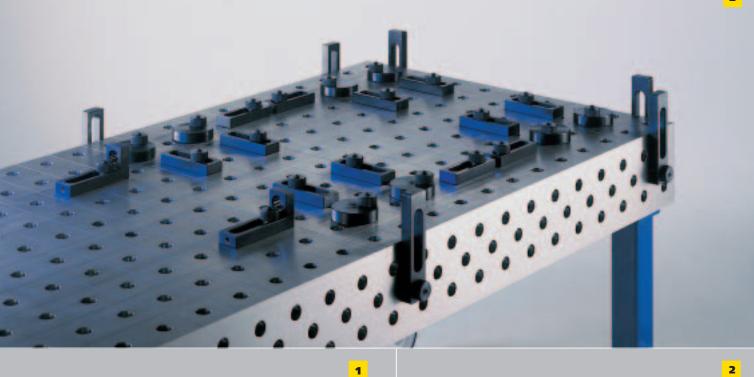

Remove the prototype and your set-up is ready (approx. 10 minutes). Spray bench and device with S4-Antistick. (dries out after a few minutes) Taking a photo for documentation is useful.

Place the prototype or part of a previous series on the bench and position the stops as desired, giving the desired play

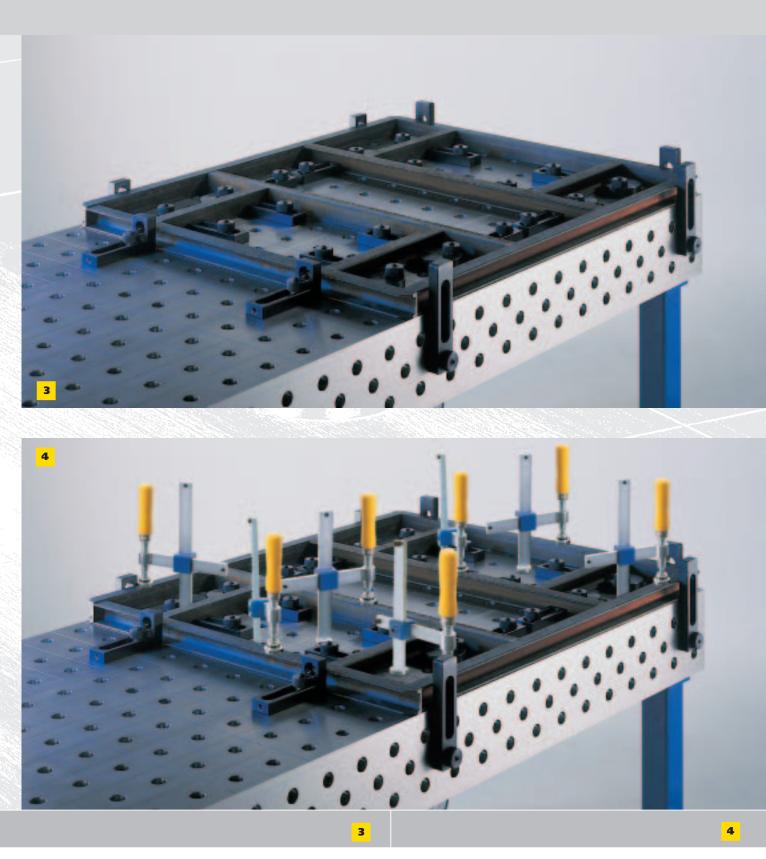

Clamp, haste and remove (if needed, you can weld without hasteing) and insert the next part

Cut parts layed together. If needed, the parts you want to weld has to have a distance between the table and the part. Parts which had been sprayed by anti-tick-liquid and to be cleaned, then finally lacquered.



Using our tool trolley, tools are easily at hand!



Accessories



Keeping order in half the job!

Well sorted and quickly at hand - saves nerves and time for searching. Your entire tool set has room on our trolley.

Your service mobile!

article no. 0910

Tool trolley

This is how you can save your tools to damages



article no. 0854

Allen key 14 - 14 mm Allen Key - suitable for positioning bolts (0532, 0533) and universal-angle large (0171)

article no. 0852

Allen key 6 - 6 mm Allen key - suitable for bearing bolts (0510, 0520, 0530) and universal-angle small (0170)

article no. 0820

Brush Ø 30 mm - for cleaning 28mm inch drilled holes

article no. 0850


Allen key Handwheel Ø 75 mm - 6 mm Allen key - suitable for Spherical clamping bolts 0510, 0520, 0530

article no. 0840

Allen key Handwheel Ø 50 mm - 6 mm Allen Key - suitable for Spherical clamping bolts 0510, 0520, 0530



Sets

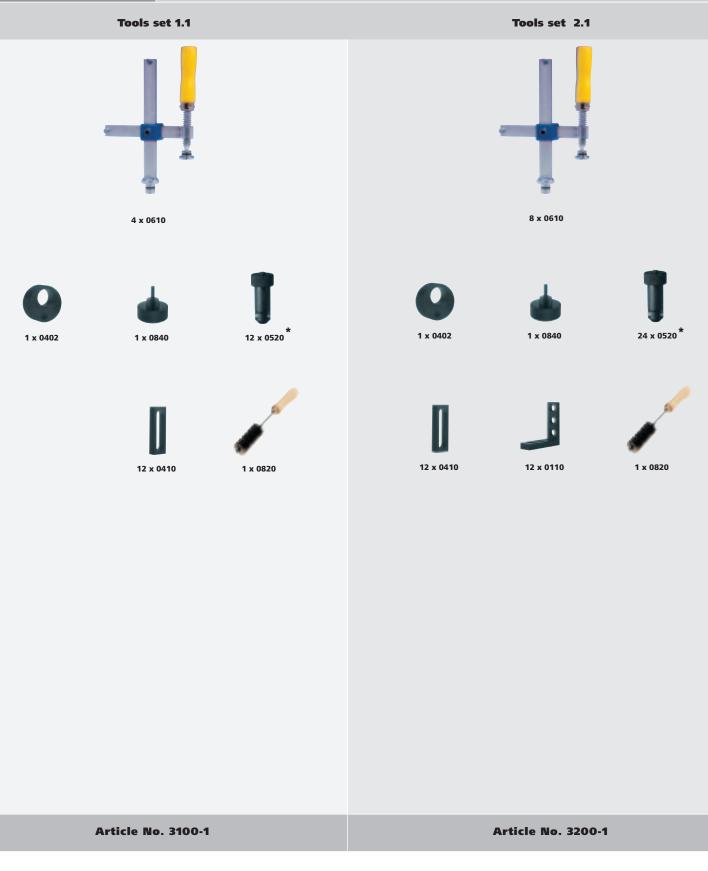

* Article 0520 / 0530 could be delivered against a slightly higher price as fast clamping bolt (article 0510 / 0512).







The perfect completion to a welding bench!

Antistick

Allow your welding bench a longer life. S4 Antistick works through creating a light metal dividing face and prevents the sticking of welding sparks from steel. Compare the effect with normal welding dividing anti stick sprays!

S4 Antistick is affected through the creation of a light metal seperate layer and prevents the adhesion of the welding nozzle on steel and cast iron surfaces. Compare it with usual sprays!





article no. 0924

S4 Anti-stick liquid 1 kg Spray bottle



article no. 0922

S4 Anti-stick liquid 1kg Canister article no.


S4 Anti-stick liquid Canister - 5 kg **0926** - 33 kg **0928**

Cleaning concentrate on request!



Aluminium Plate for stainless steel works





If you work with iron and stainless steel on the table, think about using an aluminium plate. The plate has got the same holes as the bench and seperates the iron from the stainless steel.

articleno.:

Aluminium plate - 996 x 996 x 2 mm - 1996 x 996 x 2 mm - 2396 x 1196 x 2 mm - 2996 x 1496 x 2 mm

System 28 Welding and Clamping Bench

Manufacturer:

Bernd Siegmund GmbH Ährenstraße 29 D - 86845 Großaitingen Telefon: (+49) 0 82 03 / 96 07 - 0 FAX: (+49) 0 82 03 / 96 07 - 33 s4@weldingtables.com www.weldingtables.com

Your distributor:



Bernd Siegmund Gruppe



